

FOLDER-GLUERS


# T-FOLD PRO

2000 / 2400 / 3000



HIGH RESPONSIVE  
CARTON CONVERTING  
MACHINERY

**ADGM**

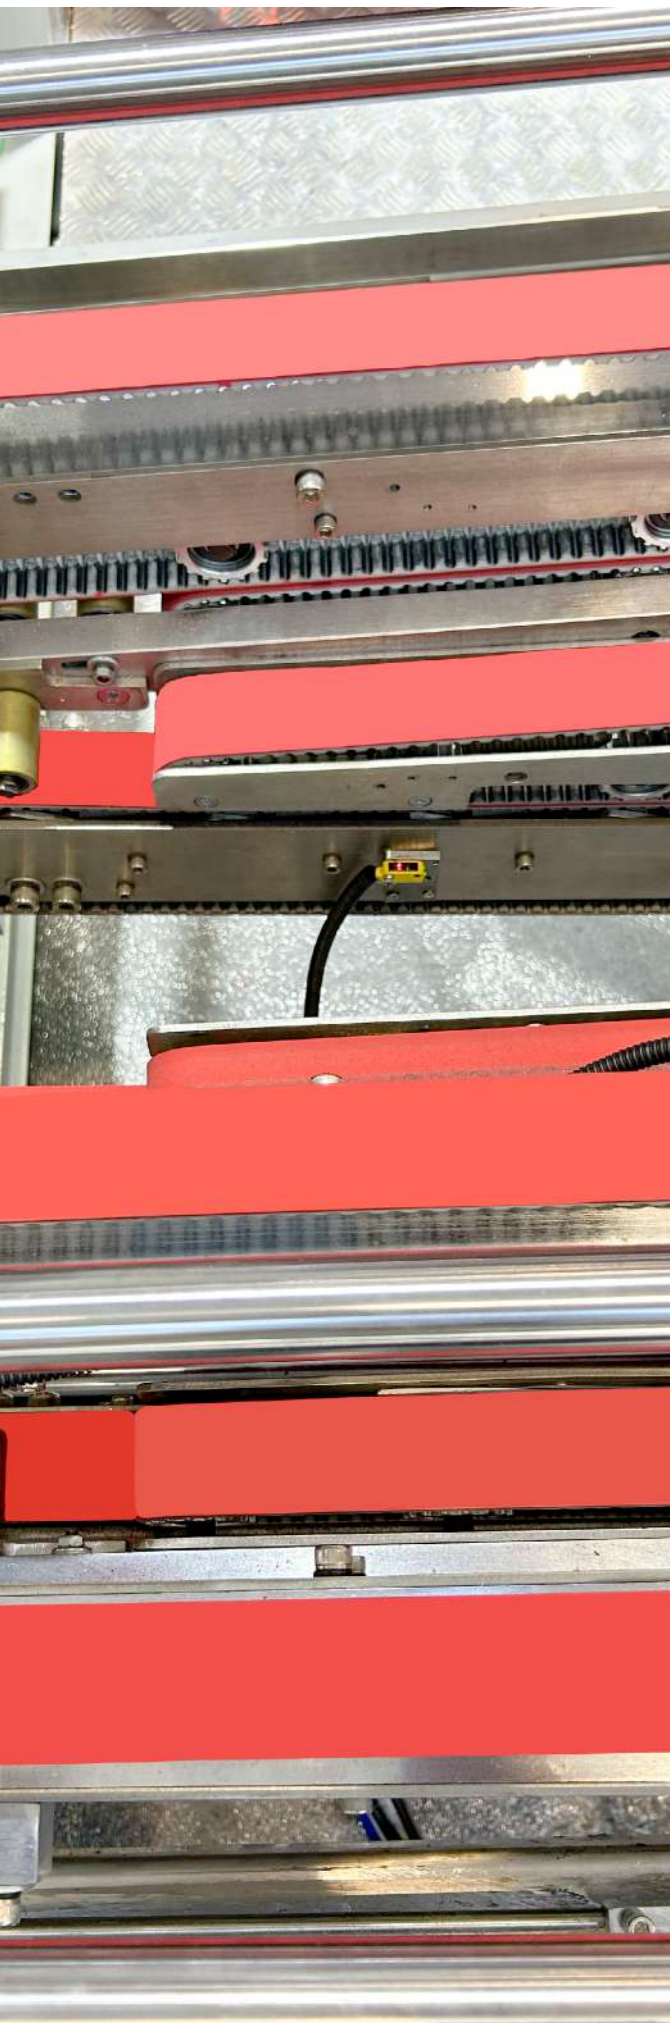

# T-FOLD PRO

2000 / 2400 / 3000



## A high capacity production solution

### DOUBLE FEEDER

TFold Pro by DGM – a breakthrough in carton pasting technology designed to revolutionize heavy-duty corrugated box processing. This versatile machine can be installed to work offline as a standalone folder gluer or integrated inline with another folder gluer, like the MegaFold, to create more complex carton boxes.

Combining advanced features with traditional benefits, the T-Fold Pro enhances efficiency, reduces labor costs, and leverages the durability and eco-friendliness of corrugated boxes. Elevate your packaging operations and gain a competitive edge with the T-Fold Pro, where innovation meets functionality.

### AT A GLANCE



**FAST PROCESSING**

150m/min



**WIDE RANGE**



**MATERIALS**

Corrugated



**FLEXIBLE & EASY TO OPERATE**




**CERTIFICATED**


### BOXES




Over lapped \*\*




Two pieces side by side \*



Wine box with partitions \*

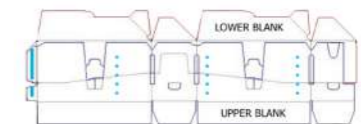

TwinBox / TwinPack lock bottom box\*



TwinBox / TwinPack American box\*

\* Need to work with Folder Gluer

\*\* Can work alone on T-Fold Pro

# T-FOLD PRO

2000 / 2400 / 3000



1 Deliver solution

Two sets of upper carriers with wide belts, driven independently with adjustable pressure.



2 Trombone

Four sets of upper carriers plus 4 sets of lower carriers all driven independently by servo motor.



3 Glue system

Electronic gluing system with hot-melt and cold glue capabilities. Dual-system ensures optimal adhesion



4 Linear guide and gear track

Linear guide combined with gear track ensures perfect straightness, achieving alignment near zero tolerance.



5 Side register

This system registers the blanks on their progress towards the gluing section, getting perfect alignment.



6 Feeder section

Upper and lower independently driven feeders, capable to operate continuous or intermittent modes.

## SPECIFICATIONS

### T-FOLD PRO

#### Processed materials


Carton board max.	400 g/m <sup>2</sup>	Blank length	350 to 1700 mm
Corrugated flute type	A, B, C, E, K, BC, EB, AB, 3 to 5 layers	Two pieces box unfolded width	max. 6000 mm
<b>Capability</b>		Precision	+/- 1 mm
Speed max.	150 m/min	Upper feeder pile height	300 mm
Inching speed	20 m/min	Lower feeder pile height	300 mm
Thickness of open blank	max. 10 mm	Glue	Hotmelt and Cold glue
Blank width	500 to 3000 mm		

#### Dimensions & weight






	2000	2400	3000
Length	14.70 m	14.70 m	14.70 m
Width	3.50 m	3.90 m	4.50 m
Height	2.66 m	2.66 m	2.66 m
Net Weight	8.00 Ton	9.00 Ton	10.00 Ton

#### Installation


Electrical connected load	40 kW	40 kW	40 kW
Compressed air	10 bar	10 bar	10 bar
Air compressor capacity	150 m <sup>3</sup> /h	150 m <sup>3</sup> /h	150 m <sup>3</sup> /h
Air tank capacity	150 L	150 L	150 L

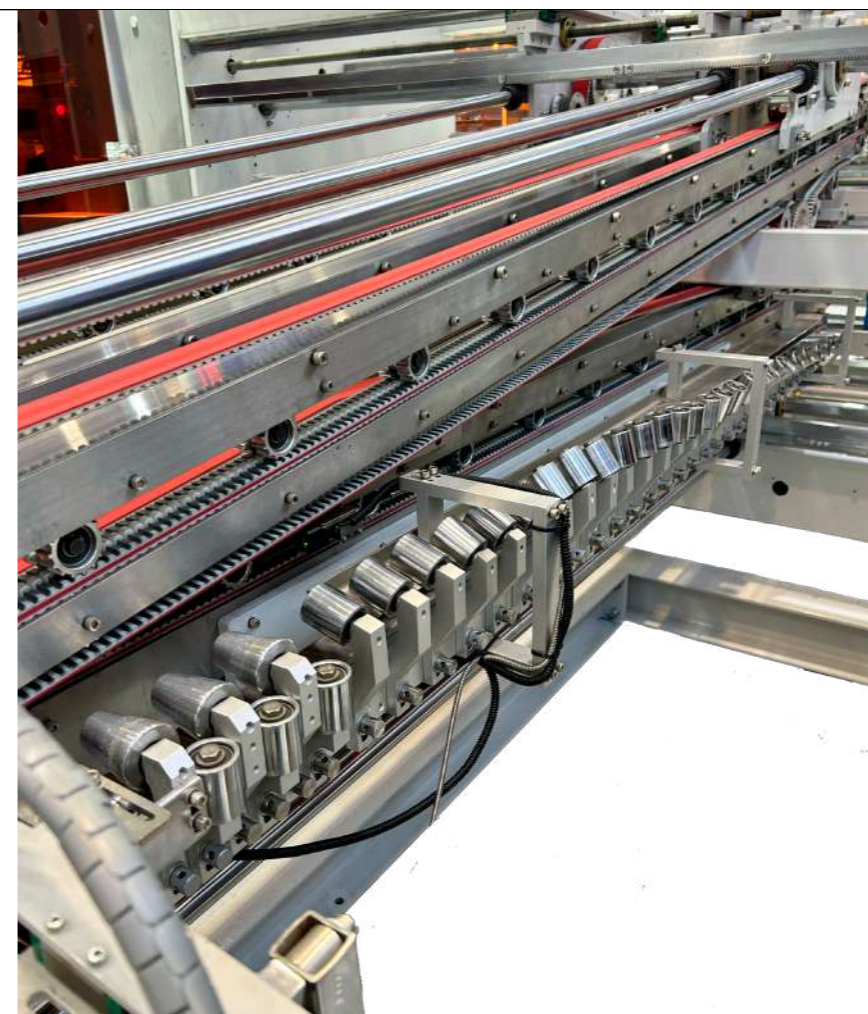

## BOXES

	2000	2400	3000
 <p><b>Over lapped</b></p>	A: 500 - 2000 mm B: 350 - 1700 mm E: 35 - 50 mm	A: 500 - 2400 mm B: 350 - 1700 mm E: 35 - 50 mm	A: 500 - 3000 mm B: 350 - 1700 mm E: 35 - 50 mm
 <p><b>Two pieces side by side</b></p>	A: 500 - 1000 mm B: 350 - 1700 mm E: 15 - 50 mm	A: 500 - 1200 mm B: 350 - 1700 mm E: 15 - 50 mm	A: 500 - 1500 mm B: 350 - 1700 mm E: 15 - 50 mm
 <p><b>Wine box with partitions</b></p>	A: 500 - 1200 mm B: 350 - 1700 mm C&D: 40 - 920 mm E: 15 - 40 mm	A: 500 - 2400 mm B: 350 - 1700 mm C&D: 40 - 1120 mm E: 15 - 40 mm	A: 500 - 3000 mm B: 350 - 1700 mm C&D: 40 - 1420 mm E: 15 - 40 mm
 <p><b>TwinBox / TwinPack lock bottom box</b></p>	A: 500 - 2000 mm B: 350 - 1700 mm C: 130 - 850 mm D: 40 - 920 mm E: 15 - 40 mm b: 120 mm	A: 500 - 2400 mm B: 350 - 1700 mm C: 130 - 1050 mm D: 40 - 1120 mm E: 15 - 40 mm b: 120 mm	A: 500 - 3000 mm B: 350 - 1700 mm C: 130 - 1350 mm D: 40 - 1420 mm E: 15 - 40 mm b: 120 mm
 <p><b>TwinBox / TwinPack American box</b></p>	A: 500 - 2000 mm B: 350 - 1700 mm C&D: 40 - 920 mm E: 15 - 40 mm b: 120 mm	A: 500 - 2400 mm B: 350 - 1700 mm C&D: 40 - 1120 mm E: 15 - 40 mm b: 120 mm	A: 500 - 3000 mm B: 350 - 1700 mm C&D: 40 - 1420 mm E: 15 - 40 mm b: 120 mm

## SCHEME T-FOLD PRO

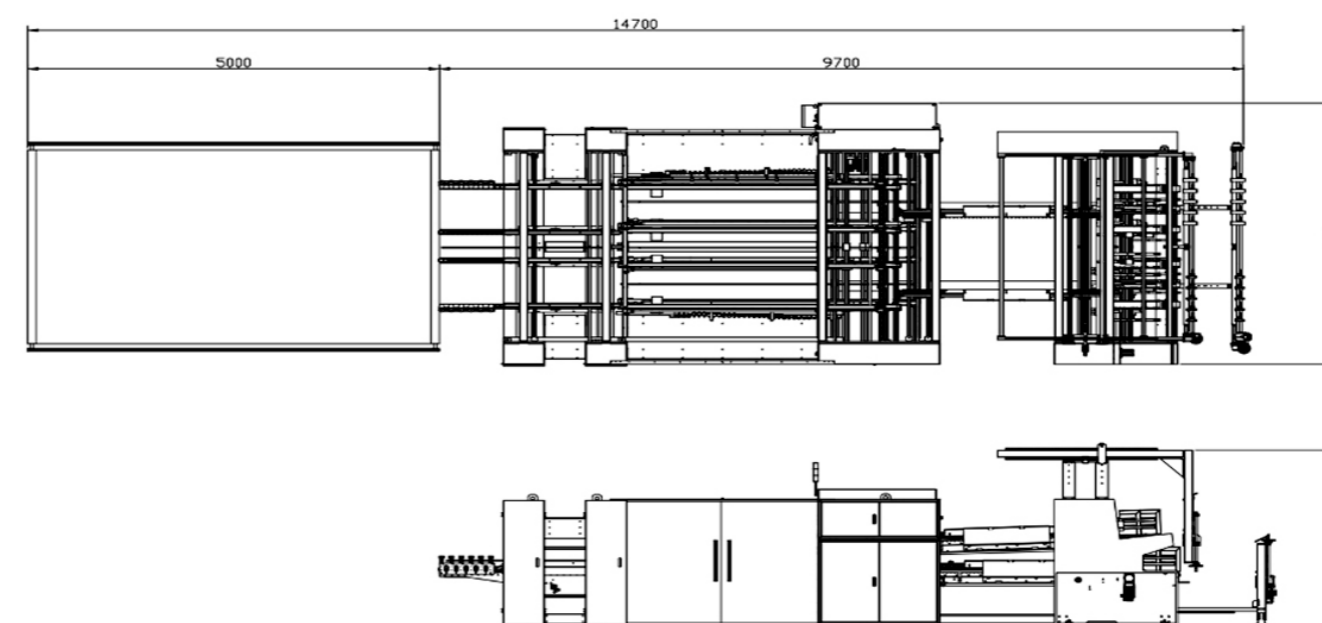



[info@dgm-global.com](mailto:info@dgm-global.com)  
[www.dgm-global.com](http://www.dgm-global.com)

TEL (86) 0752-277 37 80  
FAX (86) 0752-277 37 78

HuiHuan Industrial Area, Huizhou City,  
Guangdong Province, China

DGM Technology (China) Co., Ltd